COMPLETE SET-UP OIL & GREASE (O&G)

REF.: PM-O&G

STREAMLINE YOUR TESTING PROCESS WITH OUR COMPREHENSIVE O&G TEST SET-UP.

WATER BATH

SPECIFICATIONS

• Temperature Range: Room Temperature + 5°C... + 99,9 °C • Temperature Setting: 0,1 °C • Control Panel: Easy setting and operating, adjustable temperature, alarm signal display Single Line 4 digitals LED • Temperature Display: ± 0,2 • Uniformity: ± 0,2 (37°C) • Heating Time: 100 min (from 30°C to 80°C at RT 25°C) • Input Power: 400 W • Overheat Protection: The power will automatically be turned of when the internal temperature is over 110 °C • Stainless Steel bath: 4 L • Bath Inner dimensions: 238 x 135 x 146 mm (L x W x H) • Outer Dimension: 380 x 212 x 250 mm (L x W x H) • Weight : 4 kg •

VACUUM PUMP

Piston-powered | Quiet | Low vibration | Compact | Lightweight | Oil free | Maintenance-free

SPECIFICATIONS

• Max. vacuum: 670 mm Hg, 50 Hz – 60 Hz • Max flow rate: 17 l/min – 20 l/min • Horse power: 1/8 HP • Pole: 4 P • Net weight: 4.1.kgs • Port thread: 5/16 inch (8 mm) • Noise level: 50db •



BALANCE

SPECIFICATIONS

- *Max. capacity: 220 g*
- *Minimal load: 0,01g*
- *Readability: 0,0001 g*
- *Tare range: 220 g*
- *Linearity: ± 0,0002 g*
- *Pan size: ø 100 mm*
- *Stabilization time: 3,5 sec.*
- *Calibration: Internal (automatic)*
- *Interface: 2xRS232, 2xUSB(A+B), WIFI (optional)*
- *Working temperature: + 10°C – +40°C*
- *Size: 333x206x355 mm*

OVEN

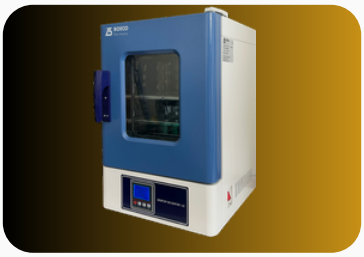

- LCD fuzzy-PID control temperature controller with overtemperature protection
- Stainless Steel inner chamber, adjustable shelf & lock handle.
- The external chamber is made from anti corrosion coated cold-rolled steel.
- Door with a double toughened glass window for easy observation. High temperature silica gel sealing strip: good sealing & prevent heating loss.

SPECIFICATIONS

• Volume: 18 l • Heating power: 600W • Operating Temp. Range: Room Temperature + 10°C... + 300°C • Temp. Uniformity: ± 0,5 • Temp. Fluctuation: ± 0,5 • Temperature Setting: 0,1°C • Time range: 1 -9999min, continuous • Max. Number of shelfs: 2 • Shelf Load: 15 kg • Internal Dimension: 260 x 260 x 260 mm (L x W x H) • External Dimension: 460 x 510 x 695 mm (L x W x H) • Weight: 20 kg •

info@csqanalytics.com https://csqanalytics.com

06-651 9118 / 017-928 3580 (WhatsApp)

CSQ® Analytics

| Commitment | Satisfaction | Quality |